

IL-X....- VT6 series Ø60 power LED design


18




Technical data - Electrical ratings

Voltage supply	12VDC to 24VDC 24VAC, 110VAC, 220VAC
Signal type	Continuous (S) Strobe (Ç) Flashing (F) Rotation (D)
Consumption w/o load with buzzer	1-2W
Buzzer output	90dB
Dimensions	80 x 60 x 100mm
Weight approx	240g
Housing material	abs
Base material	abs
Connection	Cable or M12 connector
Buzzer tone type	Continuous or flashing
Protection	IP54 / IP65

Technical drawings

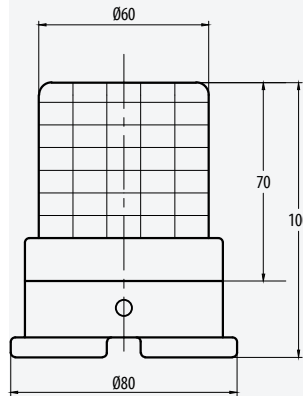

Connections

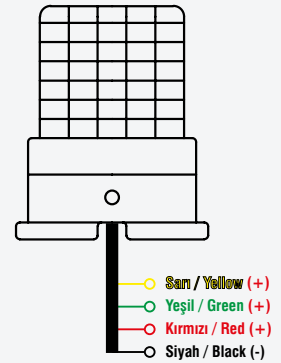

Code key

IL-X P S-VT 6-24 3 - A2

SIGNAL TYPE

- S : Sabit / Continuous
- F : Flaşör / Flashing
- Ç : Çakar / Strobe
- D : Döner / Rotating
- SB : Sabit + Buzzer / Continuous+Buzzer
- FB : Flaşör + Buzzer / Flashing+Buzzer
- ÇB : Çakar + Buzzer / Strobe+Buzzer
- DB : Döner + Buzzer / Rotating+Buzzer

MOUNTING TYPE

VT : Vida Tabana Montaj / Screw + base mounting

LIGHT SOURCE

L : LED
P : POWER LED

SUPPLY VOLTAGE

12 : 12VDC
24 : 24VDC / VAC
48 : 48VDC
110 : 110VAC
220 : 220VAC

CONNECTOR

A2 : 20mm cable
C4 : 4pole connector

LENS COLOR

- K : Kırmızı / Red ●
- S : Sarı / Yellow ●
- Y : Yeşil / Green ●
- M : Mavi / Blue ●
- B : Beyaz / White ○
- 3 : ● ● ●

BODY

6 : Ø60